

DEV-C®系列电控柜照明系统 Enclosure Lights

技术参数 Technical Data


- 光源开关 Light switch:	常开/常闭/门控 on/off/door contact
- 备用电源插座 Additional receptacle:	10A(USA/UK/CHINA)
- 光源颜色 Light colour:	冷白色 Cool white(840)
- 工作环境温度 Operation temperature:	-20 to +50°C(-4 to +122°F)
- 储存环境温度 Storage temperature:	-45 to +70°C(-49 to +158°F)
- 外壳颜色 Housing colour:	RAL7035
- 防护等级 Type of protection:	IP 20
- 安规认证 Approvals:	CE

可选附件 Suitable accessories

- 门控开关 Plugin door contact switch
- 灯管防护罩 Protective covering for Enclosures light
- 其他国家格式备用电源插座 (如: 德国, 法国)
Additional receptacle for other countries e.g.:Germany,France.



Type numbering system

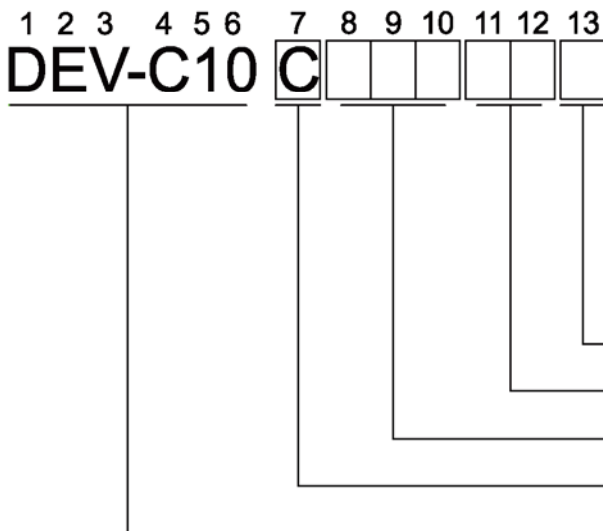

Dimensions

Type	A mm	B mm	C mm	D mm
DEV-C10C10W [] []	309	240	225	180
DEV-C10C13W [] []	337	240	225	180
DEV-C10C18W [] []	353	240	225	180
DEV-C10C26W [] []	370	240	225	180

结构形式 Structural style ⑤

工作电压 Operating voltage ④

功率 Power ③

光源类型 Lamp type ②

系列名称 Series name ①

② Lamp type		③ Power			
Code	Lamp type	Code	Power	Light intensity	Lamp life
C	紧凑型节能荧光灯 Compact fluorescent lamp	10W	10W (equal to a 60W incandescent bulb)	565Lm	8000h
		13W	13W (equal to a 75W incandescent bulb)	900Lm	8000h
		18W	18W (equal to a 100W incandescent bulb)	1130Lm	8000h
		26W	26W (equal to 2x75W incandescent bulb)	1700Lm	8000h
④ Operating voltage		Code	⑤ Structural style		
Code	Voltage	H			
01	AC 198-240V/50-60Hz				
02	AC 110-240V/50-60Hz				
03	AC 12V±10%/50-60Hz				
04	AC 24V±10%/50-60Hz				
05	AC 36V±10%/50-60Hz				
06	DC 12V±10%				
07	DC 24V±10%				
08	DC 48V±10%				